



# PRODUCT DATASHEET

**Confidex**  
**Windshield Label™**

## CONTENTS

1.	PRODUCT DESCRIPTION .....	2
1.1	OVERVIEW .....	2
1.2	SPECIFICATION DATA.....	2
1.3	DIMENSIONS .....	3
1.4	ELECTRICAL PERFORMANCE.....	3
1.5	RADIATION PATTERNS.....	4
1.6	RESISTANCE AGAINST ENVIRONMENTAL CONDITIONS* .....	4
1.7	SUPPORTED SERVICES .....	4
1.8	INFORMATION OF USED MATERIALS.....	4
2.	INSTALLATION INSTRUCTIONS.....	5
2.1	LABEL ORIENTATION.....	5
2.2	PROTECTION OF TAG DURING USAGE .....	5
3.	ORDER INFORMATION .....	6

# 1. PRODUCT DESCRIPTION

## 1.1 OVERVIEW

### Introduction

Confidex Windshield Label is specially designed for fast and reliable vehicle identification. The passive UHF label is optimized to work on car windshield glass and suitable for a wide selection of automatic vehicle identification applications such as access control, parking permit, road toll collection or insurance information verification.

Confidex Windshield Label is non-transferable and cannot be removed without being destroyed. The user memory is password protected and can hold encrypted user data.

The labels are delivered in reel format and can be printed and encoded with common RFID printers. Confidex Windshield labels are customizable with surface printing, security markings or special programming. They can be delivered with special production data and delivery forms to integrate in customer issuing procedures.

The Confidex Windshield Label offers a reliable and tamper-evident solution for cost efficient traffic and vehicle management systems.

### Target applications

- Taxation, Road toll
- Access control, Parking permits
- Fleet management, Vehicle registration
- Insurance verification
- Tracking of glass based Assets

## 1.2 SPECIFICATION DATA

<b>Device type</b>	Class 1 Generation 2 passive UHF RFID transponder
<b>Air interface protocol</b>	EPCglobal Class1 Gen2, ISO 18000-6C
<b>Operational frequency</b>	860-960 MHz
<b>EPC memory</b>	up to 496 bit
<b>Extended memory</b>	TID: unique 96 bit (factory programmed) USER MEMORY: 128 bit
<b>Read range</b>	up to 8m / 26ft, reader power 2W ERP (dependent on application)
<b>Face material</b>	Paper
<b>Background adhesive</b>	Strong industrial adhesive
<b>Weight</b>	1 g
<b>Delivery format</b>	On reel
<b>Pitch on reel</b>	33.866 mm
<b>Amount on reel</b>	1500 pcs
<b>Reel core inner diameter</b>	76mm / 3"
<b>Product is RoHS compliant</b>	Yes

### 1.3 DIMENSIONS

**General dimensions**  
(Width x Height x  
Thickness)

92 mm x 26 mm x 0.2 mm



**Delivery in reel format**



### 1.4 ELECTRICAL PERFORMANCE


**Confidex  
Windshield Label**

Read range on glass up to 8 meters

\* Read ranges may vary depending on the used frequency and reader power. Presented reading ranges are calculated values in non-reflective environment, in where antennas with optimum directivity are used with maximum allowed operating power: EU 865-868 MHz (2W ERP), US 902-928 MHz (4W EIRP), and JPN 952-954MHz (4W EIRP).

## 1.5 RADIATION PATTERNS

Estimated radiation pattern when tag orientation towards reader antenna is optimized.

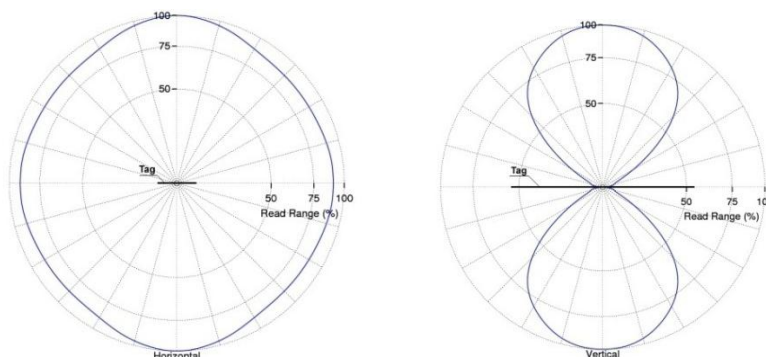

## 1.6 RESISTANCE AGAINST ENVIRONMENTAL CONDITIONS\*

<b>Operating temperature</b>	-35°C to +70°C (-31°F to +158°F)
<b>Ambient temperature</b>	-35°C to +70°C (-31°F to +158°F)
<b>Storage condition</b>	2 years in +20°C / 50% RH (shelf life for adhesive)
<b>Expected lifetime</b>	Years in normal operating conditions

*\* Values in the table are the best recommendations; resistance against environmental conditions depends on the combination of all influencing factors, exposure duration and chemical concentrations. Thus, product's final suitability for certain environmental conditions is recommended to be tested. Contact Confidex for more specific information.*

## 1.7 SUPPORTED SERVICES

There is several personalization options available for Confidex Windshield Label in order to “fine tune” the tag to match with the application requirements:

- Customer specific dual-sided full-color artwork
- Pre-encoding
- Customer specific visual printing (barcodes, human readable text, etc.)
- Data encryption

## 1.8 INFORMATION OF USED MATERIALS

<b>Back side adhesive</b>	Adhesive designed to have excellent adhesion on glass surfaces, good adhesion on other surfaces.
<b>Back side material</b>	PP material with strong adhesion to other layers.
<b>Paper face material</b>	Inkjet and thermal transfer printable. For thermal transfer printing, resin ribbon is recommended.

## 2. INSTALLATION INSTRUCTIONS

### 2.1 LABEL ORIENTATION

Confidex Windshield Label polarization is along the tag's longest dimension:



The installation should be done ideally in +20°C/50%RH conditions. For exceptional conditions, please contact Confidex. The adhesive of the label has been selected to provide best adhesion in 24 hours after the installation.

Label antenna parts should not be in contact with metal to enable best possible performance of the label. Note that metallized UV-protection films have strong effect on RFID performance.

### 2.2 PROTECTION OF TAG DURING USAGE

Minimum bending diameter of the Confidex Windshield Label is defined to be 50mm. Do not bend the label above the limit. Never touch on the location of the IC. IC chip is sensitive electrical component and can be damaged if unexpected pressure is applied on the chip. Try to avoid mechanical impacts to the Confidex Windshield Label. IC and antenna may be damaged due to mechanical shocks.

### 3. ORDER INFORMATION

Product number	Product name
3000498	Confidex Windshield Label (blank)

For additional information and technical support contact Confidex Ltd.

#### FINLAND

Confidex Ltd.

Haarlankatu 1 B, 33230 Tampere, Finland

Tel. +358 10 4244 100 Fax. +358 10 4244 110

contact@confidex.net www.confidex.net

#### USA

Confidex Inc.

1502 Fair Weather Ct., Apex, NC 27523, USA

Tel. +1 919 349 5607 fax +1 810 958 0515

www.confidex.net

#### CHINA

Confidex China

2F, Building A3, Guangzhou Science Enterprise Accelerator

No.11, Kai Yuan Rd, Guangzhou Economy Development Zone

Guangzhou 510530

People's Republic of China

Tel. +86 20 3205 7361 fax +86 20 3205 1429

www.confidex.net

#### DISCLAIMER

THE MATERIALS, PRODUCTS AND SERVICES ARE SOLD SUBJECT TO ITS STANDARD CONDITIONS OF SALE, WHICH ARE INCLUDED IN THE APPLICABLE DISTRIBUTOR OR OTHER SALES AGREEMENT. ALTHOUGH ANY INFORMATION, RECOMMENDATIONS, OR ADVICE CONTAINED HEREIN IS GIVEN IN GOOD FAITH, CONFIDEX MAKES NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, (i) THAT THE RESULTS DESCRIBED HEREIN WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN INCORPORATING ITS PRODUCTS, MATERIALS, SERVICES, RECOMMENDATIONS OR ADVICE. EXCEPT AS PROVIDED IN CONFIDEX STANDARD CONDITIONS OF SALE, CONFIDEX AND ITS REPRESENTATIVES SHALL IN NO EVENT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS, PRODUCTS OR SERVICES DESCRIBED HEREIN.

Each user bears full responsibility for making its own determination as to the suitability of Confidex products, materials, services, recommendations, or advice for its own particular use. Each user must identify and perform all tests and analyses necessary to assure that its finished systems incorporating Confidex products, materials, or services will be safe and suitable for use under end-use conditions.

Nothing in this or any other document, nor any oral recommendation or advice, shall be deemed to alter, vary, supersede, or waive any provision of this Disclaimer, unless any such modification is specifically agreed to in a writing signed by Confidex.